



# TWO-POST ABOVE GROUND LIFT SELF-INSPECTION CHECKLIST

Check accessibility of lift manuals and safety instructions

Check readability of safety warning decals and rated load capacity decal

Check accessible structural components including welds for any visually apparent signs of fatigue, overloading or misuse

Inspect for proper operation of the primary latches and secondary latches

Inspect latch cable for proper tension and operation of the latches

Inspect chains with chain wear gauge and lubricate chains with quality chain lubricant

Check all points requiring lubrication

Check spotting dish is installed and in the correct location


Confirm there is adequate clearance around the lift

Inspect concrete for cracks

Inspect sheaves for cracks and make sure they are in place and turning freely

Verify arm stop is installed to prevent the inner arms from sliding out

Inspect adapters for cracks, broken "ears" and smooth operation

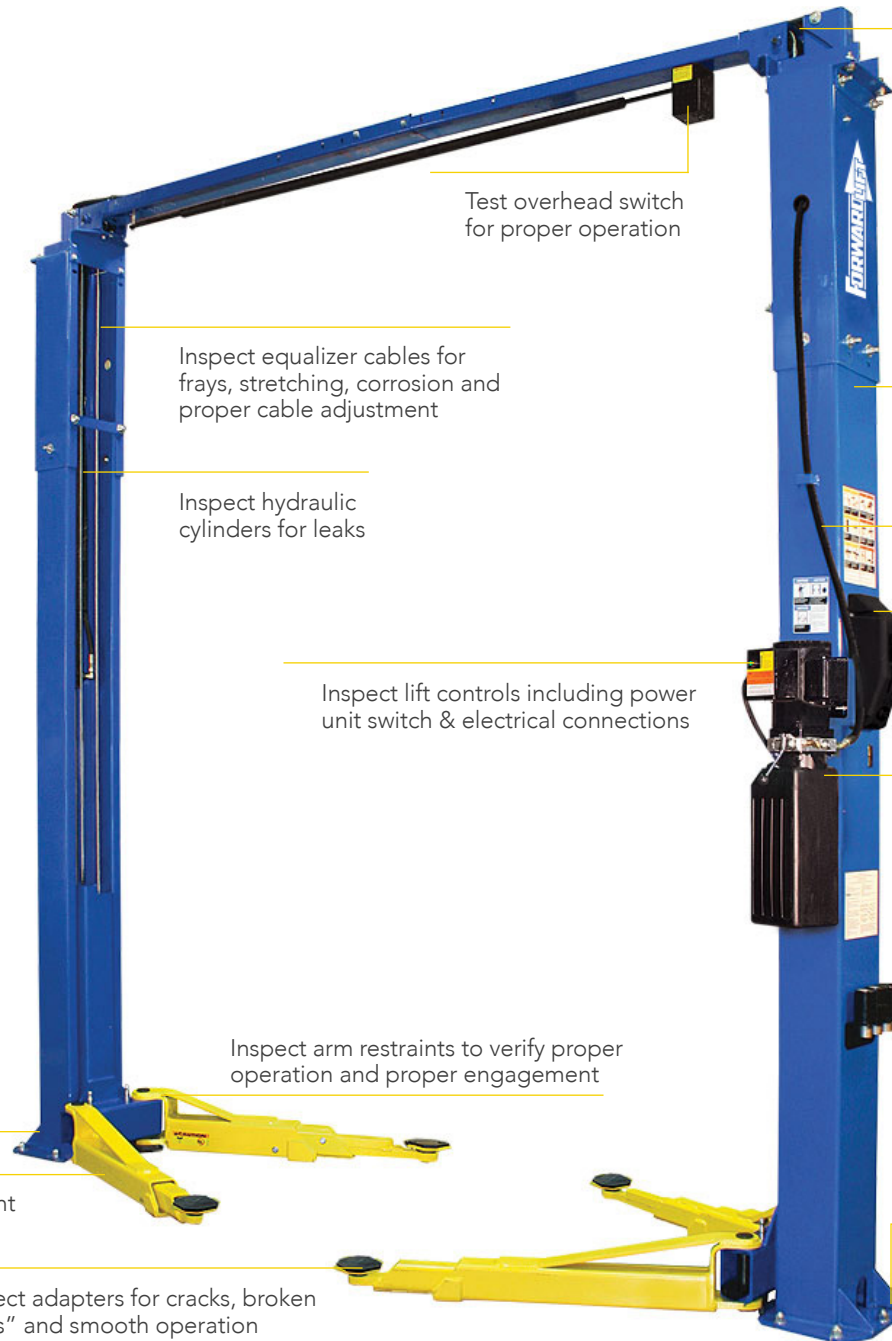

Test overhead switch for proper operation

Inspect equalizer cables for frays, stretching, corrosion and proper cable adjustment

Inspect hydraulic cylinders for leaks

Inspect lift controls including power unit switch & electrical connections

Inspect arm restraints to verify proper operation and proper engagement

Verify hoses and cables are routed properly and not rubbing

Check columns to ensure they are plumb and properly shimmed

Inspect hydraulic hoses and fittings for leaks

Verify latch covers are installed

Check fluid for contamination and proper fill levels

Check anchor bolt torque to manufacturers' recommended maintenance torque specifications